

GLAX 1 2.0 A



205 cm



6 mm
Door




5 mm
panels




CORNER ENTRY, 2 SLIDING DOORS + 2 FIXED PANELS

Design Marco Pellici

Dimensions				Code	Installation		Mixer		Glass	Select the finishing		
Dimensions (cm)	Shower tray (cm)	Total height (cm)	Access (cm)		D	S	M	T	1	UU	HH	BB
		C	*		Right	Left	Manual	Thermostatic	Clear	White soft	Black	Silver
STANDARD												
					D	S	M-	T-	1	UU	HH	BB
80 X 80	4,5	210	40	G21A80	-	-						
80 X 80	11,5	217	40	G21A89	-	-						
90 X 90	4,5	210	47	G21A90	-	-						
90 X 90	11,5	217	47	G21A99	-	-						
100 X 100	4,5	210	54	G21A100	-	-						
100 X 100	11,5	217	54	G21A109	-	-						
90 X 70	4,5	210	40	G21A9070								
90 X 70	11,5	217	40	G21A9079								
100 X 70	4,5	210	43,5	G21A107								
100 X 70	11,5	217	43,5	G21A197								
100 X 80	4,5	210	47,5	G21A108								
100 X 80	11,5	217	47,5	G21A198								
STANDARD + DOME												
					D	S	MF-	TF-	1	UU	HH	BB
80 X 80	4,5	210	40	G21A80	-	-						
80 X 80	11,5	217	40	G21A89	-	-						
90 X 90	4,5	210	47	G21A90	-	-						
90 X 90	11,5	217	47	G21A99	-	-						
100 X 100	4,5	210	54	G21A100	-	-						
100 X 100	11,5	217	54	G21A109	-	-						
90 X 70	4,5	210	40	G21A9070								
90 X 70	11,5	217	40	G21A9079								
100 X 70	4,5	210	43,5	G21A107								
100 X 70	11,5	217	43,5	G21A197								
100 X 80	4,5	210	47,5	G21A108								
100 X 80	11,5	217	47,5	G21A198								
STANDARD + DOME + LIGHT												
					D	S	MF-	TF-	1	UU	HH	BB
80 X 80	4,5	210	40	G21A80	-	-						
80 X 80	11,5	217	40	G21A89	-	-						
90 X 90	4,5	210	47	G21A90	-	-						
90 X 90	11,5	217	47	G21A99	-	-						
100 X 100	4,5	210	54	G21A100	-	-						
100 X 100	11,5	217	54	G21A109	-	-						
90 X 70	4,5	210	40	G21A9070								
90 X 70	11,5	217	40	G21A9079								
100 X 70	4,5	210	43,5	G21A107								
100 X 70	11,5	217	43,5	G21A197								
100 X 80	4,5	210	47,5	G21A108								
100 X 80	11,5	217	47,5	G21A198								
SAUNA BASIC												
					D	S	M5-	T5-	1	UU	HH	BB
80 X 80	4,5	210	40	G21A80	-	-						
80 X 80	11,5	217	40	G21A89	-	-						
90 X 90	4,5	210	47	G21A90	-	-						
90 X 90	11,5	217	47	G21A99	-	-						
100 X 100	4,5	210	54	G21A100	-	-						
100 X 100	11,5	217	54	G21A109	-	-						
90 X 70	4,5	210	40	G21A9070								
90 X 70	11,5	217	40	G21A9079								
100 X 70	4,5	210	43,5	G21A107								
100 X 70	11,5	217	43,5	G21A197								
100 X 80	4,5	210	47,5	G21A108								
100 X 80	11,5	217	47,5	G21A198								

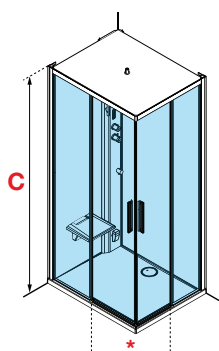

S Left



D Right



WHITE



BLACK



SILVER

GLAX 1 2.0 | FINISHES

	PROFILE	HANDLES	EQUIPPED PANEL	SOAP HOLDER	BACK WALL PANELS	SHOWER TRAY	DOME *	SEAT *
WHITE	Soft white	Soft white	Soft white	Soft white	White	Shiny white	Soft white	White
BLACK	Soft black	Soft black	Soft black	Soft black	White	Shiny white	Soft white	White
SILVER	Silver	Chrome	Silver	Chrome	White	Shiny white	Soft white	White

* available depending on the model

GLAX 1 2.0 | FUNCTIONS AND EQUIPMENT (available depending on the model)



Manual or Thermostatic mixer and Hand shower



Dome with Shower head



Soap holder



Bluetooth



Foldaway seat



Electronic soft-touch control panel



Chromolight (hammam version)
Led ceiling (essential version)



Steam generator + Steam and aroma dispenser



GLAX 1 2.0 2P WHITE



Clean and contemporary design with large glass surfaces and few profiles. The glass roof is integrated into the edge of the top profiles



Foldaway seat





The white or Chromolight programming of the colors is elegantly integrated into the column.




Emotional and sensorial experience by the steam generator and aroma diffuser.

GLAX 1 2.0




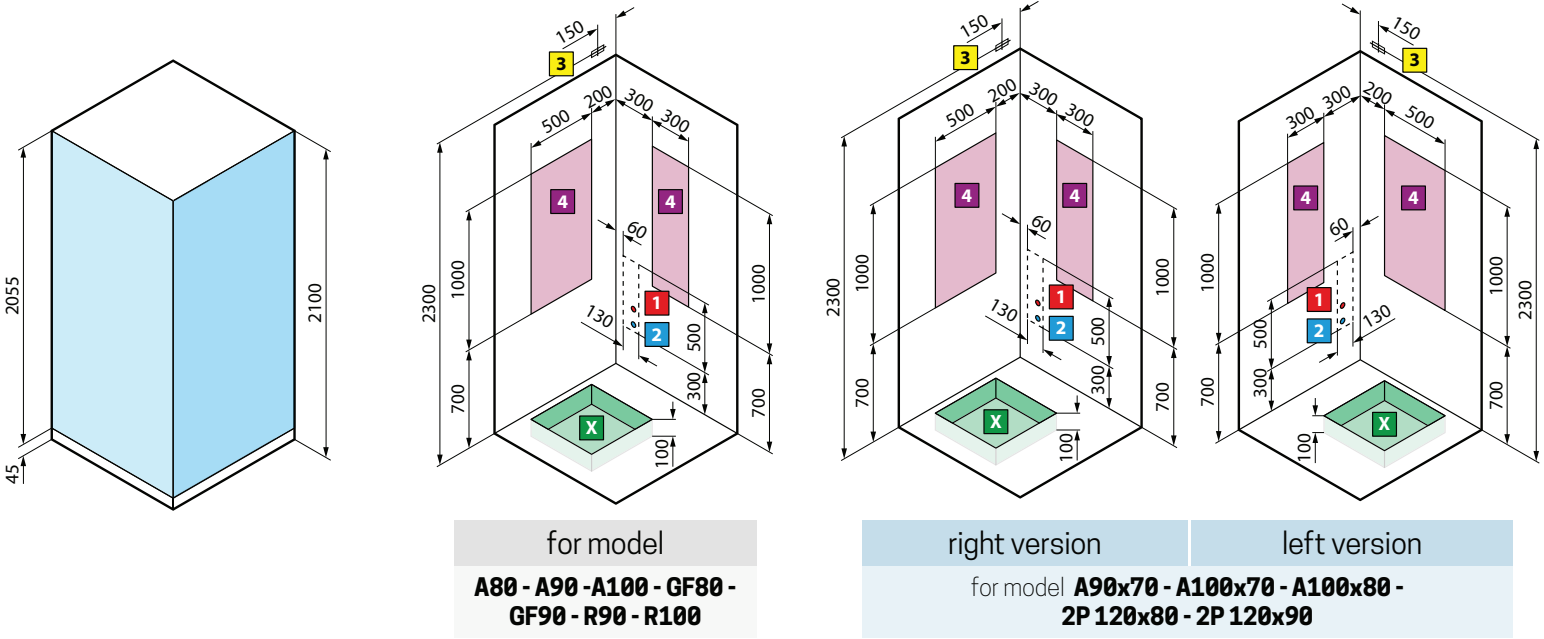




model	A ± 3	B ± 3
A80	796	796
A90	896	896
A 100	996	996
GF80	796	796
GF90	896	896



model	A ± 3	B ± 3
R90	896	896
R100	996	996

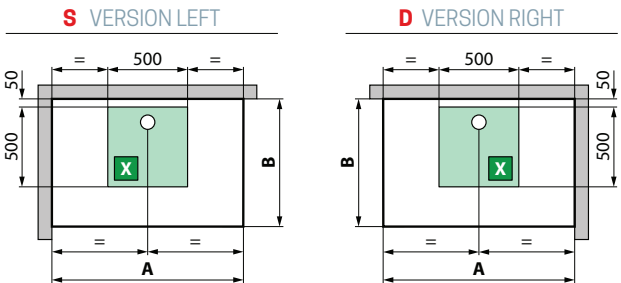

model	A ± 3	B ± 3
A90x70	896	696
A100x70	996	696
A100x80	996	796
2P120x80	1196	796
2P120x90	1196	896





Visual inspection
not possible




HYDRAULIC CHARACTERISTICS:
Optimal dynamic pressure 2÷5 bar
Hot water 1/2"
Cold water 1/2"
Drain connection ø 40 mm

ELECTRICAL CHARACTERISTIC:
Supply voltage: 220-230 V
Frequency: 50/60 Hz
Maximum absorbed power: 2600 W
Nominal power rating: 2500 W


WARNING! Install a 30mA differential switch upstream of the appliance with a multiple-pole switch with a minimum contact opening ≥ 3 mm.

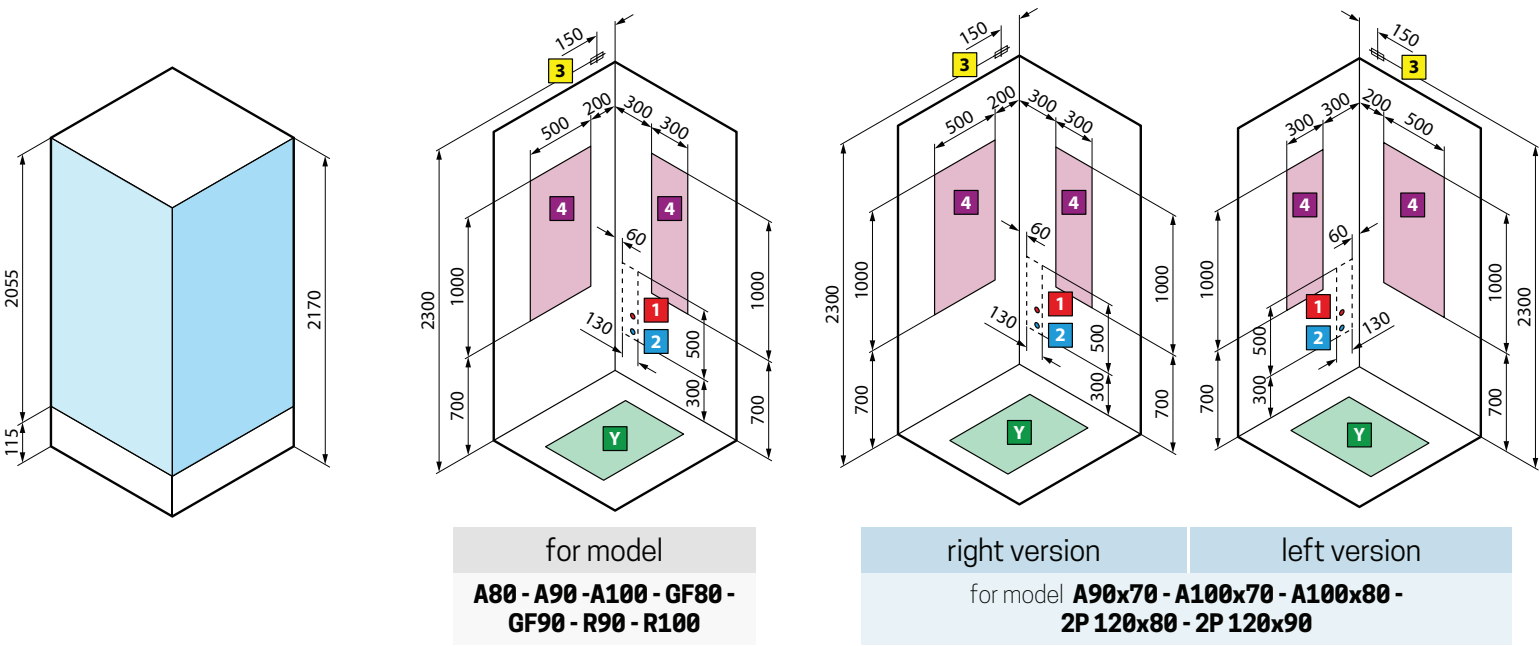


model	A ± 4	B ± 4
A80	798	798
A90	898	898
A 100	998	998
GF80	798	798
GF90	898	898



model	A ± 4	B ± 4	E
R90	898	898	500
R100	998	998	600

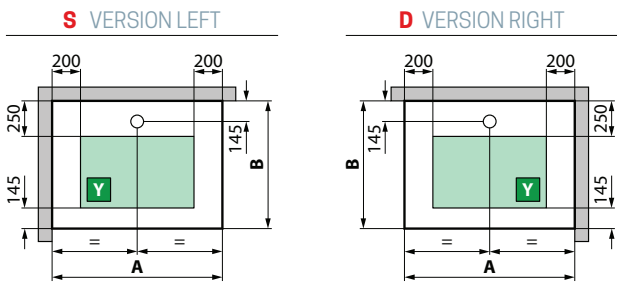

model	A ± 4	B ± 4
A90x70	898	698
A100x70	998	698
A100x80	998	798
2P120x80	1198	798
2P120x90	1198	898

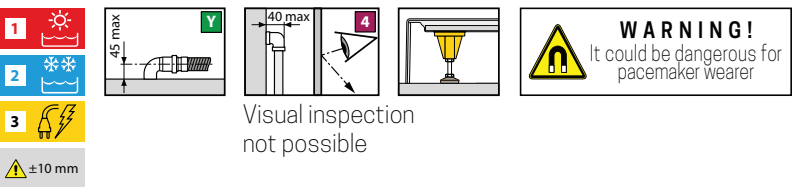

HYDRAULIC CHARACTERISTICS:
Optimal dynamic pressure 2÷5 bar
Hot water 1/2"
Cold water 1/2"
Drain connection ø 40 mm

ELECTRICAL CHARACTERISTIC:
Supply voltage: 220-230 V
Frequency: 50/60 Hz
Maximum absorbed power: 2600 W
Nominal power rating: 2500 W

WARNING! Install a 30mA differential switch upstream of the appliance with a multiple-pole switch with a minimum contact opening ≥ 3 mm.