

GLAX 22.0 A



MULTIFUNCTION SHOWER CUBICLE, CORNER ENTRY WITH 2 SLIDING DOORS + 2 FIXED PANELS IN LINE

Design Marco Pellici

Dimensions				Code	Installation		Mixer	Glass	Select the finishing				
Dimensions (cm)	Shower tray (cm)	Total height (cm)	Access (cm)		D	S	T	1	UH	UU	HU	BB	TU
		C	*		Right	Left	Thermostatic	Clear	White	Total White	Black	Silver	Corda

HYDRO													
					D	S	T1-	1	UH	UU	HU	BB	TU
80 X 80	H 4,5	0	40	G22A80									
80 X 80	H 11,5	0	40	G22A89									
90 X 90	H 4,5	0	47	G22A90	-	-							
90 X 90	H 11,5	0	47	G22A99									
100 X 100	H 4,5	0	54	G22A100									
100 X 100	H 11,5	0	54	G22A109									
90 X 70	H 4,5	0	40	G22A9070									
90 X 70	H 11,5	0	40	G22A9079									
100 X 70	H 4,5	0	43,5	G22A107									
100 X 70	H 11,5	0	43,5	G22A197									
100 X 80	H 4,5	0	47,5	G22A108									
100 X 80	H 11,5	0	47,5	G22A198									

HYDRO PLUS													
					D	S	T1L-	1	UH	UU	HU	BB	TU
80 X 80	H 4,5	0	40	G22A80									
80 X 80	H 11,5	0	40	G22A89									
90 X 90	H 4,5	0	47	G22A90	-	-							
90 X 90	H 11,5	0	47	G22A99									
100 X 100	H 4,5	0	54	G22A100									
100 X 100	H 11,5	0	54	G22A109									
90 X 70	H 4,5	0	40	G22A9070									
90 X 70	H 11,5	0	40	G22A9079									
100 X 70	H 4,5	0	43,5	G22A107									
100 X 70	H 11,5	0	43,5	G22A197									
100 X 80	H 4,5	0	47,5	G22A108									
100 X 80	H 11,5	0	47,5	G22A198									

HAMMAM													
					D	S	T5-	1	UH	UU	HU	BB	TU
80 X 80	H 4,5	0	40	G22A80									
80 X 80	H 11,5	0	40	G22A89									
90 X 90	H 4,5	0	47	G22A90	-	-							
90 X 90	H 11,5	0	47	G22A99									
100 X 100	H 4,5	0	54	G22A100									
100 X 100	H 11,5	0	54	G22A109									
90 X 70	H 4,5	0	40	G22A9070									
90 X 70	H 11,5	0	40	G22A9079									
100 X 70	H 4,5	0	43,5	G22A107									
100 X 70	H 11,5	0	43,5	G22A197									
100 X 80	H 4,5	0	47,5	G22A108									
100 X 80	H 11,5	0	47,5	G22A198									

STEAM-LINE GENERATOR - AUTOMATICALLY PURGES SYSTEM TO PREVENT LIMESCALE BUILD-UP. LOW MAINTENANCE. NO FILTER REQUIRED


IN STOCK UK

(Other products)
Please check availability




GLAX 2 2.0

GLAX 2 2.0 A TOTAL WHITE



S Left



D Right

REQUIRED





COMPULSORY
Imperial to Metric flex
waste adaptor

Code
RISCCAB


Price

GLAX 2.0 SHOWER TRAY 45 MM


TECHNICAL DATA

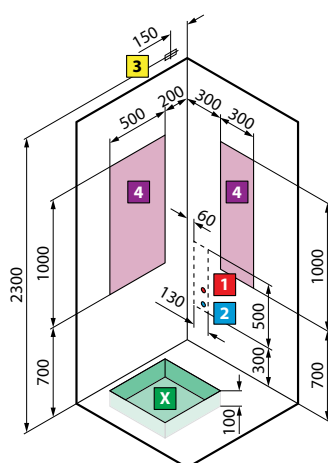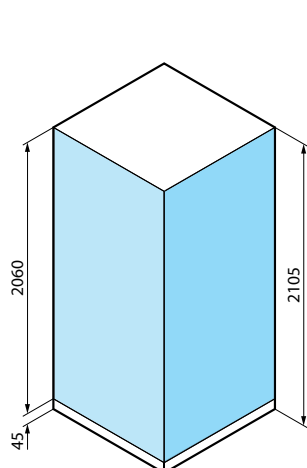

for model
**A80 - A90 - A100 - GF80 -
GF90 - R90 - R100**

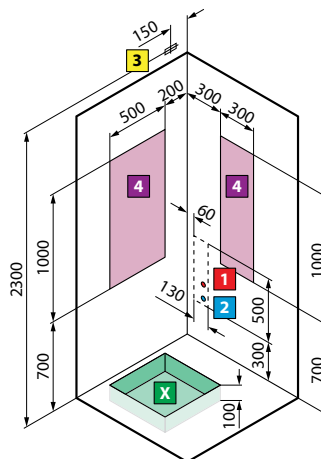


right version

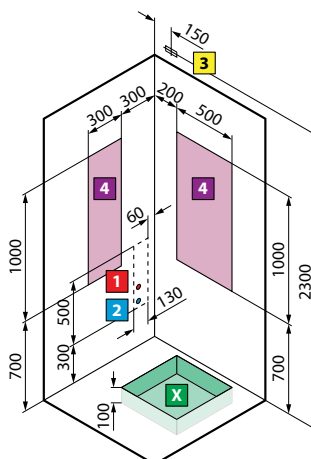


left version

for model **A90x70 - A100x70 - A100x80 -
2P 120x80 - 2P 120x90**




model	A ± 3	B ± 3
A80	796	796
A90	896	896
A 100	996	996
GF80	796	796
GF90	896	896




model	A ± 3	B ± 3
R90	896	896
R100	996	996




S VERSION LEFT



D VERSION RIGHT



model	A ± 3	B ± 3
A90x70	896	696
A100x70	996	696
A100x80	996	796
2P120x80	1196	796
2P120x90	1196	896



Visual inspection
not possible



HYDRAULIC CHARACTERISTICS:

Optimal dynamic pressure 2÷5 bar
Hot water 1/2"
Cold water 1/2"
Drain connection ø 40 mm



ELECTRICAL CHARACTERISTIC:

Supply voltage: 220-230 V
Frequency: 50/60 Hz
Maximum absorbed power: 2600 W
Nominal power rating: 2500 W


WARNING! Install a 30mA differential switch upstream of the appliance with a multiple-pole switch with a minimum contact opening ≥ 3 mm.

GLAX 2.0 SHOWER TRAY 115 MM


TECHNICAL DATA

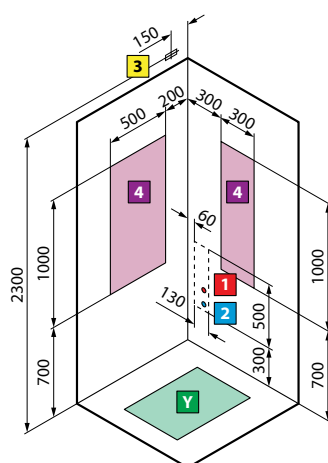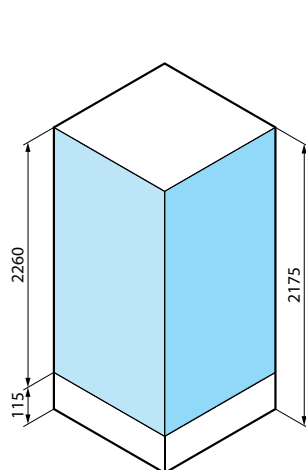

for model
**A80 - A90 - A100 - GF80 -
GF90 - R90 - R100**

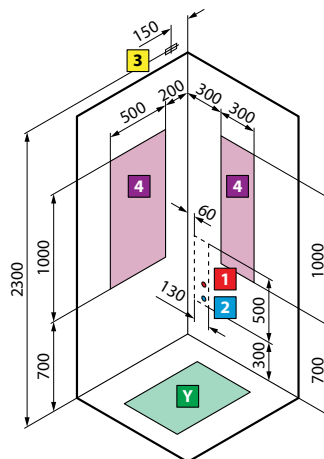


right version

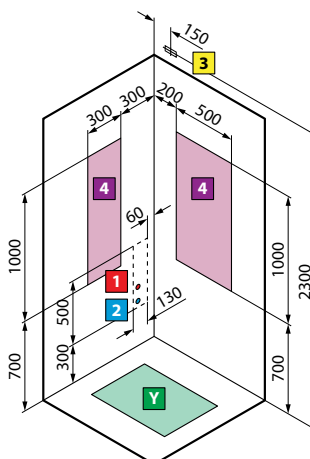


left version

for model **A90x70 - A100x70 - A100x80 -
2P120x80 - 2P120x90**




model	A ± 4	B ± 4
A80	798	798
A90	898	898
A100	998	998
GF80	798	798
GF90	898	898




model	A ± 4	B ± 4	E
R90	898	898	500
R100	998	998	600


S VERSION LEFT




D VERSION RIGHT



model	A ± 4	B ± 4
A90x70	898	698
A100x70	998	698
A100x80	998	798
2P120x80	1198	798
2P120x90	1198	898



Visual inspection
not possible



HYDRAULIC CHARACTERISTICS:
Optimal dynamic pressure 2÷5 bar
Hot water 1/2"
Cold water 1/2"
Drain connection ø 40 mm

ELECTRICAL CHARACTERISTIC:
Supply voltage: 220-230 V
Frequency: 50/60 Hz
Maximum absorbed power: 2600 W
Nominal power rating: 2500 W

WARNING! Install a 30mA differential switch upstream of the appliance with a multiple-pole switch with a minimum contact opening ≥ 3 mm.