


# GLAX 2 2.0 G+F





## PIVOT DOOR + SIDE PANEL

Design Marco Pellici

Dimensions				Code	Installation		Mixer		Glass	Select the finishing							
Dimensions (cm)	Shower tray (cm)	Total height (cm)	Access (cm)		D	S	M	T	1	UH	UU	HU	BB	TU			
		<b>C</b>	*		Right	Left	Manual	Thermo-static	Clear	White	Total White	Black	Silver	Corda			
<b>HYDRO</b>																	
					<b>D</b>	<b>S</b>	<b>M1-</b>	<b>T1-</b>	<b>1</b>	<b>UH</b>	<b>UU</b>	<b>HU</b>	<b>BB</b>	<b>TU</b>			
80 X 80	4,5	210	61	<b>G22GF80</b>													
80 X 80	11,5	217	61	<b>G22GF89</b>													
90 X 90	4,5	210	71	<b>G22GF90</b>													
90 X 90	11,5	217	71	<b>G22GF99</b>													
<b>HYDRO PLUS</b>																	
					<b>D</b>	<b>S</b>	<b>M1L-</b>	<b>T1L-</b>	<b>1</b>	<b>UH</b>	<b>UU</b>	<b>HU</b>	<b>BB</b>	<b>TU</b>			
80 X 80	4,5	210	61	<b>G22GF80</b>													
80 X 80	11,5	217	61	<b>G22GF89</b>													
90 X 90	4,5	210	71	<b>G22GF90</b>													
90 X 90	11,5	217	71	<b>G22GF99</b>													
<b>HAMMAM</b>																	
					<b>D</b>	<b>S</b>	<b>M5-</b>	<b>T5-</b>	<b>1</b>	<b>UH</b>	<b>UU</b>	<b>HU</b>	<b>BB</b>	<b>TU</b>			
80 X 80	4,5	210	61	<b>G22GF80</b>													
80 X 80	11,5	217	61	<b>G22GF89</b>													
90 X 90	4,5	210	71	<b>G22GF90</b>													
90 X 90	11,5	217	71	<b>G22GF99</b>													



GLAX 2 2.0 G WHITE

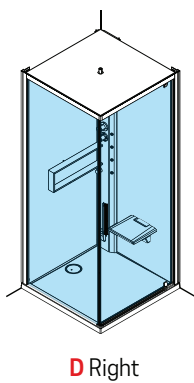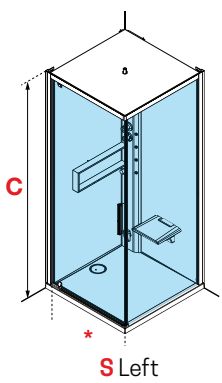



## GLAX 2 2.0 | FINISHES

	PROFILE	HANDLES	EQUIPPED PANEL + SOAP HOLDER	BACK WALL PANELS	SHOWER TRAY	DOME *	SEAT *
<b>WHITE</b>	Black soft	Black soft	Soft white	Black	Soft white	Soft white	White
<b>TOTAL WHITE</b>	Soft white	Soft white	Soft white	White	Soft white	Soft white	White
<b>BLACK</b>	Soft white	Soft white	Black soft	White	Materic black	Black soft	White
<b>SILVER</b>	Silver	Chrome	Silver	White	Shiny white	Soft white	White
<b>CORDA</b>	Soft white	Soft white	Corda	White	Materic corda	Corda	White

\* available depending on the model

## GLAX 2 2.0 | FUNCTIONS AND EQUIPMENT (available depending on the model)


- Manual or Thermostatic mixer and Hand shower
- Dome with Shower head
- Body hydromassage
- Soap holder
- Bluetooth
- Foldaway seat
- Electronic soft-touch control panel
- Chromolight (hammam+hydro plus version) Led ceiling (hydro version)
- Steam generator + Steam and aroma dispenser



GLAX 2 2.0 2P CORDA



Clean and contemporary design with large glass surfaces e few profiles. The glass roof is integrated into the edge of the top profiles



The white LED light or with chromolight program, is integrated into the column





Relaxing and tonic vertical hydromassage




Emotional and sensorial experience by the steam generator and aroma diffuser.




# GLAX 2 2.0

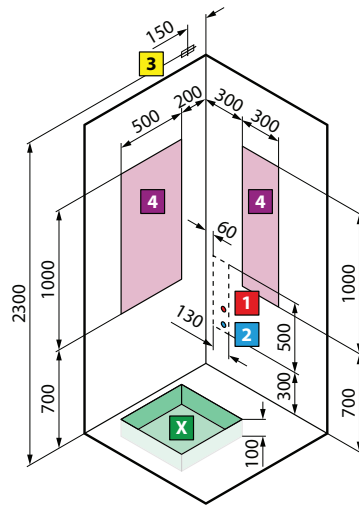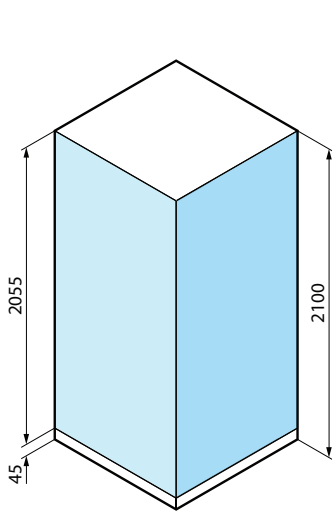


for model  
**A80 - A90 - A100 - GF80 - GF90 - R90 - R100**

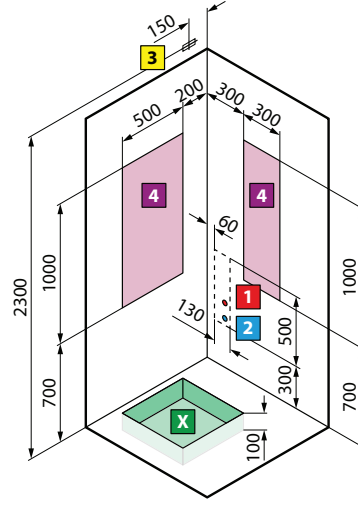



right version      left version  
for model **A90x70 - A100x70 - A100x80 - 2P120x80 - 2P120x90**




model	A ± 3	B ± 3
<b>A80</b>	796	796
<b>A90</b>	896	896
<b>A 100</b>	996	996
<b>GF80</b>	796	796
<b>GF90</b>	896	896



model	A ± 3	B ± 3
<b>R90</b>	896	896
<b>R100</b>	996	996



model	A ± 3	B ± 3
<b>A90x70</b>	896	696
<b>A100x70</b>	996	696
<b>A100x80</b>	996	796
<b>2P120x80</b>	1196	796
<b>2P120x90</b>	1196	896

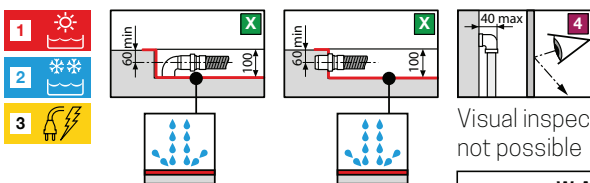



Visual inspection not possible

**WARNING!**  
It could be dangerous for pacemaker wearer


**HYDRAULIC CHARACTERISTICS:**  
Optimal dynamic pressure 2÷5 bar  
Hot water 1/2"  
Cold water 1/2"  
Drain connection ø 40 mm

**ELECTRICAL CHARACTERISTIC:**  
Supply voltage: 220-230 V  
Frequency: 50/60 Hz  
Maximum absorbed power: 2600 W  
Nominal power rating: 2500 W



**WARNING!** Install a 30mA differential switch upstream of the appliance with a multiple-pole switch with a minimum contact opening ≥ 3 mm.

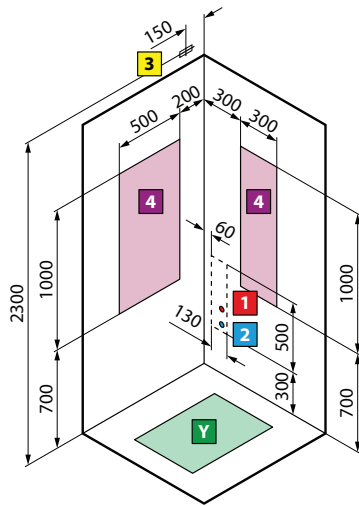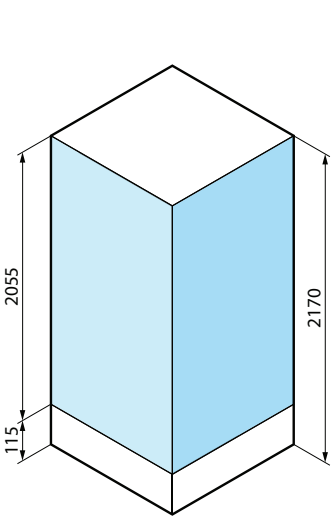


for model  
**A80 - A90 - A100 - GF80 - GF90 - R90 - R100**

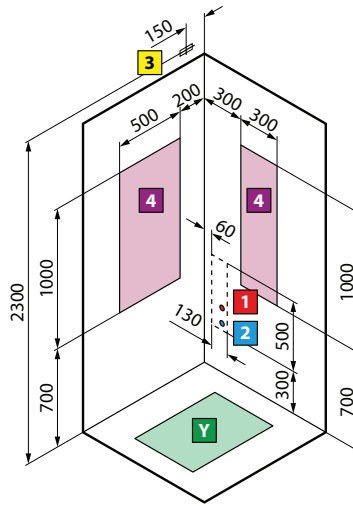



right version  
for model **A90x70 - A100x70 - A100x80 - 2P 120x80 - 2P 120x90**

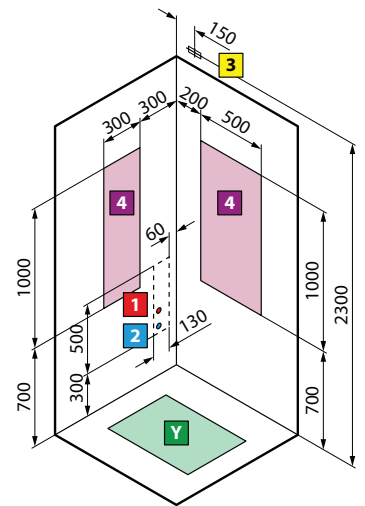

model	A ± 4	B ± 4
<b>A80</b>	798	798
<b>A90</b>	898	898
<b>A 100</b>	998	998
<b>GF80</b>	798	798
<b>GF90</b>	898	898



model	A ± 4	B ± 4	E
<b>R90</b>	898	898	500
<b>R100</b>	998	998	600



model	A ± 4	B ± 4
<b>A90x70</b>	898	698
<b>A100x70</b>	998	698
<b>A100x80</b>	998	798
<b>2P120x80</b>	1198	798
<b>2P120x90</b>	1198	898

**WARNING!**  
It could be dangerous for pacemaker wearer

**HYDRAULIC CHARACTERISTICS:**  
Optimal dynamic pressure 2÷5 bar  
Hot water 1/2"  
Cold water 1/2"  
Drain connection ø 40 mm

**ELECTRICAL CHARACTERISTIC:**  
Supply voltage: 220-230 V  
Frequency: 50/60 Hz  
Maximum absorbed power: 2600 W  
Nominal power rating: 2500 W

**WARNING!** Install a 30mA differential switch upstream of the appliance with a multiple-pole switch with a minimum contact opening ≥ 3 mm.