


GLAX 22.0 R




MULTIFUNCTION COMPLETE STEAM CUBICLE - QUADRANT - 2 SLIDING DOORS + 2 FIXED PANELS

Design Marco Pellici

Dimensions				Code	Mixer		Glass	Select the finishing				
Dimensions (cm)	Shower tray (cm)	Total height (cm)	Access (cm)		M	T	1	UH	UU	HU	BB	TU
		C	*		Manual	Thermostatic	Clear	White	Total White	Black	Silver	Corda
HYDRO												
					M1-	T1-	1	UH	UU	HU	BB	TU
90 X 90	4,5	210	49	G22R90								
90 X 90	11,5	217	49	G22R99								
100 X 100	4,5	210	49	G22R100								
100 X 100	11,5	217	49	G22R109								
HYDRO PLUS												
					M1L-	T1L-	1	UH	UU	HU	BB	TU
90 X 90	4,5	210	49	G22R90								
90 X 90	11,5	217	49	G22R99								
100 X 100	4,5	210	49	G22R100								
100 X 100	11,5	217	49	G22R109								
HAMMAM												
					M5-	T5-	1	UH	UU	HU	BB	TU
90 X 90	4,5	210	49	G22R90								
90 X 90	11,5	217	49	G22R99								
100 X 100	4,5	210	49	G22R100								
100 X 100	11,5	217	49	G22R109								



GLAX 2 2.0 R SILVER





GLAX 2 2.0 | FINISHES

	PROFILE	HANDLES	EQUIPPED PANEL + SOAP HOLDER	BACK WALL PANELS	SHOWER TRAY	DOME *	SEAT *
WHITE	Black soft	Black soft	Soft white	Black	Soft white	Soft white	White
TOTAL WHITE	Soft white	Soft white	Soft white	White	Soft white	Soft white	White
BLACK	Soft white	Soft white	Black soft	White	Materic black	Black soft	White
SILVER	Silver	Chrome	Silver	White	Shiny white	Soft white	White
CORDA	Soft white	Soft white	Corda	White	Materic corda	Corda	White

* available depending on the model

GLAX 2 2.0 | FUNCTIONS AND EQUIPMENT (available depending on the model)


- Manual or Thermostatic mixer and Hand shower
- Dome with Shower head
- Body hydromassage
- Soap holder
- Bluetooth
- Foldaway seat
- Electronic soft-touch control panel
- Chromolight (hammam+hydro plus version) Led ceiling (hydro version)
- Steam generator + Steam and aroma dispenser



GLAX 2 2.0 2P CORDA



Clean and contemporary design with large glass surfaces e few profiles. The glass roof is integrated into the edge of the top profiles

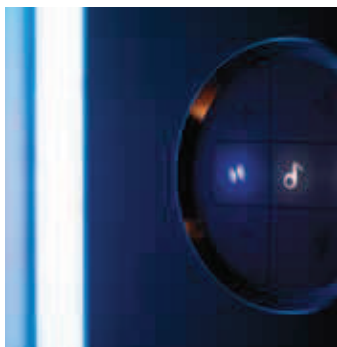

The white LED light or with chromolight program, is integrated into the column





Relaxing and tonic vertical hydromassage




Emotional and sensorial experience by the steam generator and aroma diffuser.




GLAX 2 2.0

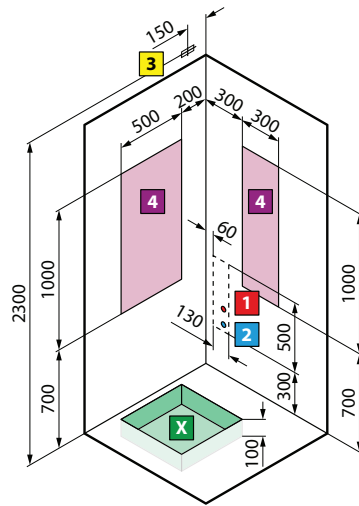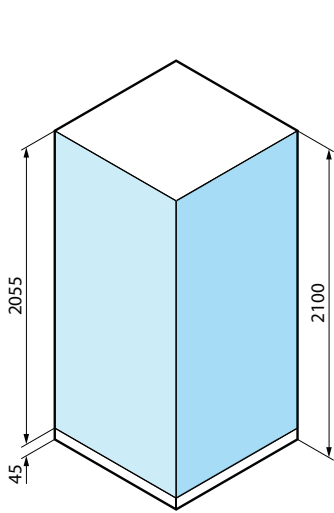


for model
A80 - A90 - A100 - GF80 - GF90 - R90 - R100

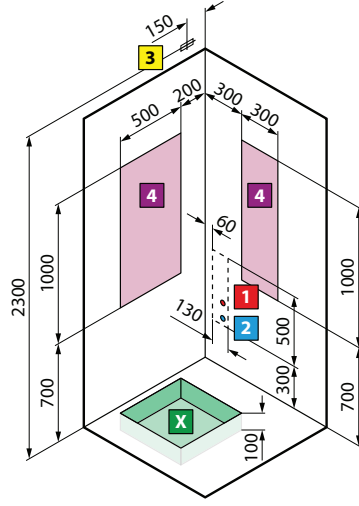



right version left version
for model **A90x70 - A100x70 - A100x80 - 2P120x80 - 2P120x90**




model	A ± 3	B ± 3
A80	796	796
A90	896	896
A 100	996	996
GF80	796	796
GF90	896	896



model	A ± 3	B ± 3
R90	896	896
R100	996	996



model	A ± 3	B ± 3
A90x70	896	696
A100x70	996	696
A100x80	996	796
2P120x80	1196	796
2P120x90	1196	896

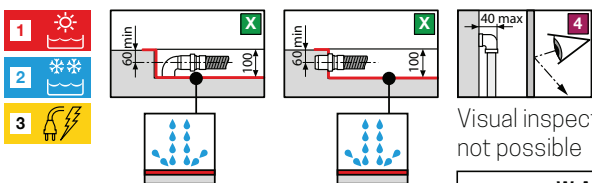



Visual inspection not possible

WARNING!
It could be dangerous for pacemaker wearer


HYDRAULIC CHARACTERISTICS:
Optimal dynamic pressure 2÷5 bar
Hot water 1/2"
Cold water 1/2"
Drain connection ø 40 mm

ELECTRICAL CHARACTERISTIC:
Supply voltage: 220-230 V
Frequency: 50/60 Hz
Maximum absorbed power: 2600 W
Nominal power rating: 2500 W


WARNING! Install a 30mA differential switch upstream of the appliance with a multiple-pole switch with a minimum contact opening ≥ 3 mm.

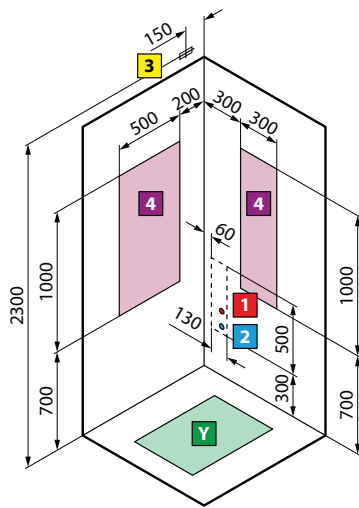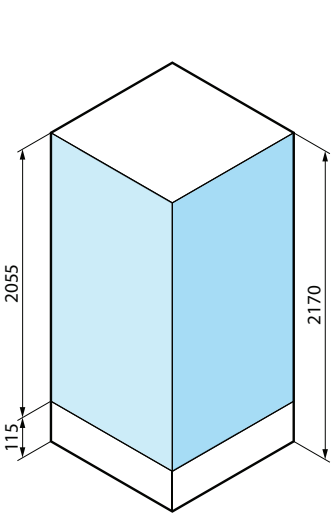


for model
A80 - A90 - A100 - GF80 - GF90 - R90 - R100

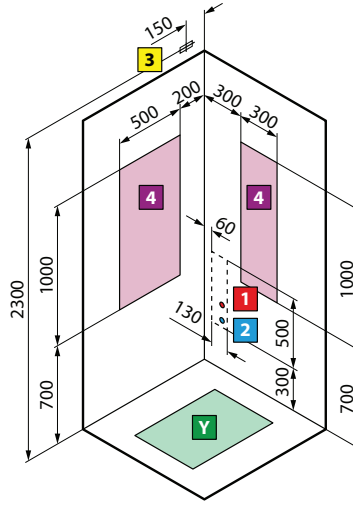



right version left version
for model **A90x70 - A100x70 - A100x80 - 2P120x80 - 2P120x90**



model	A ± 4	B ± 4
A80	798	798
A90	898	898
A100	998	998
GF80	798	798
GF90	898	898



model	A ± 4	B ± 4	E
R90	898	898	500
R100	998	998	600



model	A ± 4	B ± 4
A90x70	898	698
A100x70	998	698
A100x80	998	798
2P120x80	1198	798
2P120x90	1198	898

WARNING!
It could be dangerous for pacemaker wearer

Visual inspection not possible

HYDRAULIC CHARACTERISTICS:
Optimal dynamic pressure 2-5 bar
Hot water 1/2"
Cold water 1/2"
Drain connection ø 40 mm

ELECTRICAL CHARACTERISTIC:
Supply voltage: 220-230 V
Frequency: 50/60 Hz
Maximum absorbed power: 2600 W
Nominal power rating: 2500 W

WARNING! Install a 30mA differential switch upstream of the appliance with a multiple-pole switch with a minimum contact opening ≥ 3 mm.