

CELSIUS PATIO



DIMENSIONS

310x245 H223

360x245 H223

FUNCTIONS

	SAUNA	HAMMAM	PATIO
Electronic panel with 5 (sauna) and 3 (hammam) heat settings	●	●	-
Bench	2	1	-
Glass thickness 8 mm	●	●	●
Wood and/or lacquered steel handle	●	●	●
Footboard	●	-	-
Aroma vapouriser	-	●	-
Thermostatic mixer and hand shower	-	●	●
Shower head 30x30 cm with waterfall	-	-	●
Shelf	-	-	●
LED lighting	●	●	-
Bluetooth sound system	●	●	-
External side mirror	●	●	-
LED Chromolight	OPTIONAL	OPTIONAL	-
Hanger	OPTIONAL	OPTIONAL	-
Emergency button ¹	OPTIONAL	OPTIONAL	-
Semi-automatic boiler descaling system ²	-	OPTIONAL	-

FRAME COLOUR

External frame profile, handle, door hinge




8Y Tent grey

8W Dusty grey

86 Gravel grey

SAUNA WOOD

External and interior walls, roof



LA Abachi

LB Abachi thermo

LC Hemlock

Bench, stove cover*



LD Ayous

LE Ayous thermo

HAMMAM / SHOWER

Internal walls, tray, roof, seat




Matt white

SAUNA AVAILABLE WITH ÖNORM CERTIFICATION


Available only for HEMLOCK finish.
15% surcharge, contact us for more info.

* default matching Abachi/Hemlock -> Ayous,
Abachi Thermo -> Ayous Thermo


INSTALLATION




In recess



Right corner



Left corner



Centre of wall

¹ Functions as product switch-off, alarm sound, light switch-on, remote alarm contact shut-off.

² INTENSIVE USE: it is mandatory to install a reverse osmosis demineraliser (2°F) to remove any minerals in the water from the steam generator; INTERMITTENT USE: we recommend a semi-automatic boiler descaling system, requiring a maintenance and cleaning procedure every 500 hours approximately. The costs of ordinary boiler descaling maintenance are charged on the customer.

CELSIUS PATIO 310x245

Installation	Code	Side panel		Functions			Boiler Descaling		Frame Colour			Sauna Wood		
		Glass	Wall	White LED + audio BT	Chromolight + audio BT	Chromolight+ audio BT + Emergency	Without	With	Tent Grey	Dusty Grey	Gravel Grey	Abachi	Abachi Thermo	Hemlock

SAUNA 150X150 - HAMMAM 150X150 - PATIO 310X95 H223

		G	W	0	6	7	X-	C-	8Y	8W	86	LA	LB	LC
In recess	CL063125BI													
Right corner	CL063125AD													
Left corner	CL063125AS													
Centre of wall	CL063125CP													

CELSIUS PATIO 360x245

Installation	Code	Side panel		Functions			Boiler Descaling		Frame Colour			Sauna Wood		
		Glass	Wall	White LED + audio BT	Chromolight + audio BT	Chromolight+ audio BT + Emergency	Without	With	Tent Grey	Dusty Grey	Gravel Grey	Abachi	Abachi Thermo	Hemlock


SAUNA 200X150 - HAMMAM 150X150 - PATIO 360X95 H223

		G	W	0	6	7	X-	C-	8Y	8W	86	LA	LB	LC
In recess	CL063625BI													
Right corner	CL063625AD													
Left corner	CL063625AS													
Centre of wall	CL063625CP													


CELSIUS PATIO 310x245 GLASS/WALL





Power supply sauna: 4,5kW
Power supply hammam: 4,5kW
Total power: 9kW

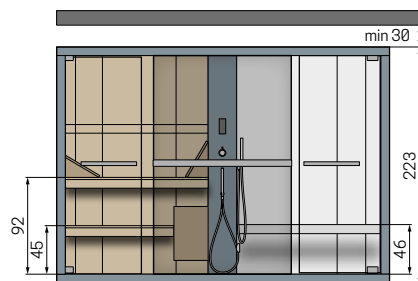


LEFT CORNER G




RIGHT CORNER G

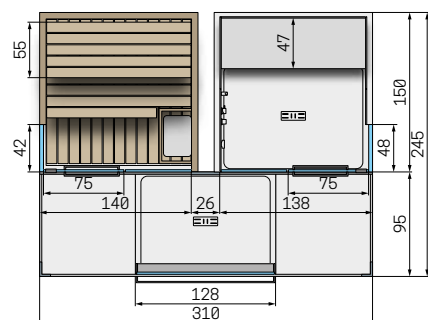

CENTRE OF WALL G




NICHE W




CELSIUS PATIO 360x245 GLASS





Power supply sauna: 6kW
Power supply hammam: 4,5kW
Total power: 10,5kW

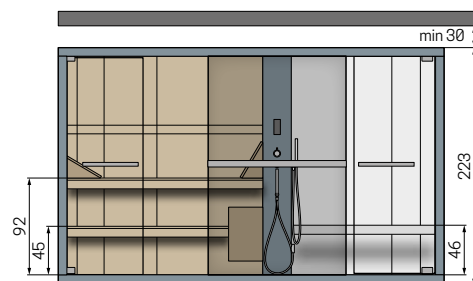

LEFT CORNER G

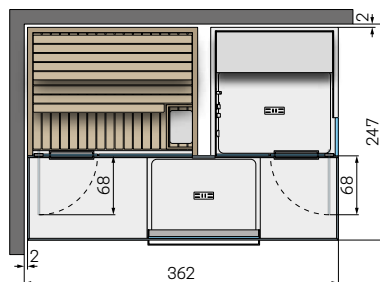


RIGHT CORNER G

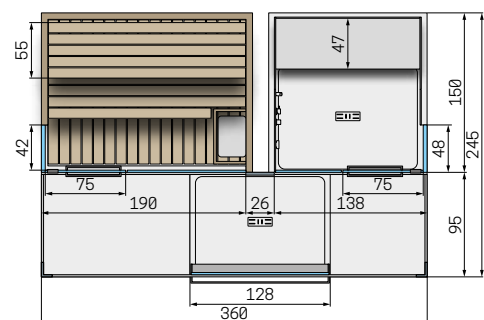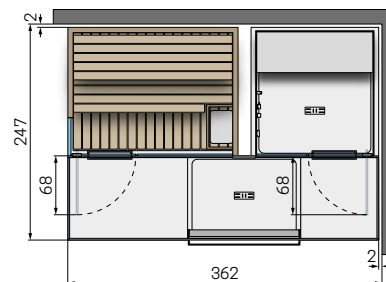

CENTRE OF WALL G



NICHE W

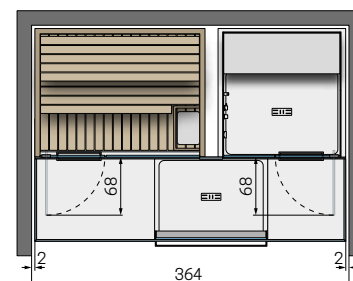

Electrical features:

Voltage: 230V 1P+N / 400V 3P+N - 50/60Hz

Hydraulic characteristics:

Working pressure 2-5bar
Hot/Cold water 1/2" shower
Cold water 1/2" Steam generator*
Syphon connection Ø40 mm



*Steam generator water supply:

For intensive use, it is mandatory to install a reverse osmosis water demineraliser (2°F).
For occasional use, a semi-automatic boiler descaling system is available

